

## → Series 9040

**9040**

Pressure reducing valves  
made of stainless steel with  
threaded connections

EDITION · THE BETTER CHOICE!

# G06Fi



# ERC

### ■ MATERIAL



### ■ SPECIFICATION



1/2" – 2"



+5°C to +85°C



**Inlet pressure:**  
up to 16 bar / 25 bar  
**Outlet pressure:**  
0,5 - 12 bar

### ■ SUITABLE FOR

Potable water cold

up to 40°C



Potable hot water

up to 85°C



### ■ EXAMPLES OF USE

Protection of water supply systems in single-family homes, apartment buildings, commercial and industrial buildings or machines against excessive supply pressure. Usage of pressure reducing valves when a constant supply pressure is required in the system.

- Protection against overpressure
- Increase of comfort and reduction of water consumption
- Drinking water supply systems
- Service water supply in industrial and building services engineering
- Machines / plants connected to the drinking water network
- Irrigation technology / Cattle fattening

### ■ MERKMALE

- First class flow rate and pressure control
- Filter screen - protection of the system with easy cleaning and contamination detection
- Housing made of high-quality stainless steel V4A
- High-quality plastic from medical technology sector
- Adjustment scale visible from two angles for adjustment without pressure gauge / operating pressure

### ■ APPROVALS

DIN-DVGW type test approval (up to 80°C) | pending

Type approval ACS | pending

TR ZU 032/2013 - TR ZU 010/2011 | pending

Approval for England | pending

#### Requirements

DIN EN 1567  
DIN 4109  
UBA BWGL for metallic materials  
DVGW W270

Elastomere guideline  
KTW guideline

### ■ MATERIALS

Component	Material	DIN EN
Body	Stainless steel	1.4408
Valve insert	Plastic   Stainless steel   Elastomere	PPSU   1.4404   EPDM
Filter cup	Plastic or Stainless steel	PA
Filter screen	Plastic   Stainless steel	POM   1.4401
Spring housing	Plastic	PA Glass fibre reinforced
O-rings	Elastomere	EPDM
Plugd	Plastic	PA Glass fibre reinforced

## Serie 9000 ■ VALVE VERSION

<b>m</b>	with diaphragm	High-quality, heat-resistant moulded elastomere, fabric-reinforced diaphragm.
----------	----------------	---

## ■ MEDIUM

<b>F</b>	liquid	for drinking water. Not suitable for steam. Other medium on request.
----------	--------	--

## ■ TYPE OF LIFTING MECHANISM

<b>0</b>	without lifting device
----------	------------------------

## ■ OUTLET PRESSURE RANGES

<b>SP</b>	Standard version	Inlet pressure: up to 25 bar	Outlet pressure: from 1,5 to 7 bar
<b>HP</b>	High-pressure version	Inlet pressure: up to 25 bar	Outlet pressure: from 3 to 12 bar
<b>LP</b>	Low-pressure version	Inlet pressure: up to 25 bar	Outlet pressure: from 0,5 to 3 bar

## ■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

Nominal diameter DN	15	20	25	32	40	50
<b>Inlet</b>	1/2" (15)	3/4" (20)	1" (25)	1 1/4" (32)	1 1/2" (40)	2" (50)
<b>Outlet</b>	1/2" (15)	3/4" (20)	1" (25)	1 1/4" (32)	1 1/2" (40)	2" (50)

## ■ TYPE OF CONNECTION INLET / OUTLET THREADED CONNECTIONS

<b>BSP-Tm / BSP-Tm</b>	Standard threaded male connection	Male thread BSP-T / Male thread BSP-T	DIN EN 10226 / DIN EN 10226
<b>Threaded connection hose nozzle</b>	on request	according to customer configuration	
<b>Bulkhead fitting with push-in connection</b>	on request	according to customer configuration	

## ■ NOMINAL PRESSURE RATING PN

<b>PN16</b>	nominal pressure rating PN16, maximum inlet pressure 16 bar	version with filter cup made of plastic
<b>PN25</b>	nominal pressure rating PN25, maximum inlet pressure 25 bar	version with filter cup made of lead-free gunmetal


## ■ SEALS

<b>EPDM</b>	Ethylene propylene diene	Elastomere moulded diaphragm and seals
-------------	--------------------------	--

Series 9040: Connection, installation dimensions, ranges of adjustment							
Nominal diameter	DN	15	20	25	32	40	50
Threaded nozzle connection DIN EN 10226-1	G1	R 1/2"	R 3/4"	R 1"	R 1 1/4"	R 1 1/2"	R 2"
Connection body DIN ISO 228-1	G2	G 3/4"	G 1"	G 1 1/4"	G 1 1/2"	G 2"	G 2 1/2"
Inlet pressure filter cup made of plastic	bar	max. 16	max. 16	max. 16	max. 16	max. 16	max. 16
Inlet pressure filter cup made of lead-free gunmetal	bar	max. 25	max. 25	max. 25	max. 25	max. 25	max. 25
Operating temperature filter cup made of plastic	°C	40	40	40	40	40	40
Operating temperature filter cup made of lead-free gunmetal	°C	85	85	85	85	85	85
Outlet pressure SP	bar	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7
Outlet pressure HP	bar	3 - 12	3 - 12	3 - 12	3 - 12	3 - 12	3 - 12
Outlet pressure LP	bar	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3
Installation dimensions in mm	L	136	152	170	191	220	254
	I	80	90	100	105	130	140
	H	89	89	111	111	151	151
	h	58	58	64	64	94	94
	T1	37	37	46	46	50	50
	SW1	30	37	46	52	65	80
	SW2	46	46	66	66	75	75
	SW3	46	46	65	65	75	75
	G3	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial
	G3	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial
Weight	kg	0,8	0,9	1,7	1,9	3,9	4,5
Coefficient of flow Kvs	m³/h	3,4	4,4	9,3	10,5	19,5	20,5

Installation dimensions without threaded connection like series 681 and D06F.

## ■ MAIN DIMENSIONS, INSTALLATION DIMENSIONS

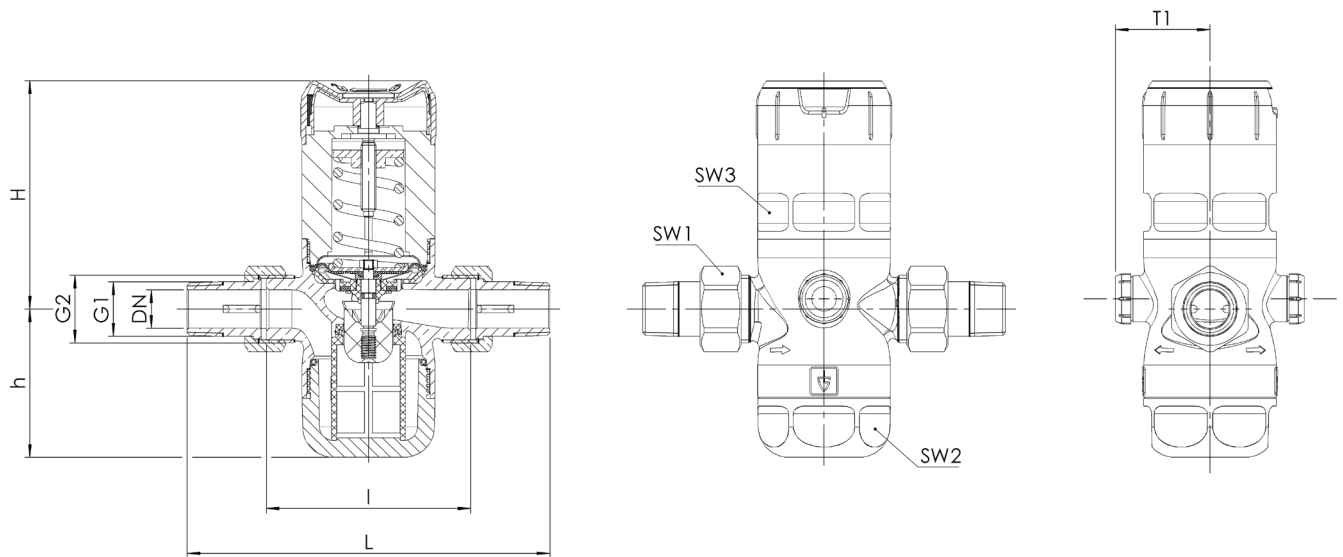

## Series 9040 ■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

Series	Valve version	Medium	Lifting device	Outlet pressure range	Nominal diameter DN	Connection type		Connection size		PN	Seal	Options	Quantity
						Inlet	Outlet	Inlet	Outlet				
9040	m	F	0	SP	20	BSP-T m	BSP-T m	20	20	PN16	EPDM	S111	8
9040	m	F	0	SP	15	BSP-T m	BSP-T m	15	15	PN16	EPDM		4
9040	m	F	0										
9040	m	F	0										

### ■ PROPERTIES

S17	Supply with manometers suitable for the valve finish (SP: 0- 10 bar   LP: 0 – 4 bar   HP: 0 – 25 bar)	<input type="checkbox"/>
S20	Supply without threaded connections	<input type="checkbox"/>
S111	Supply with threaded connections lead-free	<input type="checkbox"/>

### ■ CERTIFICATES / APPROVALS

C01	Factory certificate acc. DIN EN 10204 2.2 (WKZ 2.2)	<input type="checkbox"/>
C02	Test certificate acc. DIN EN 10204 3.1 (WPZ 3.1)	<input type="checkbox"/>
C03	Material test certificate acc. DIN EN 10204 3.1 (MPZ 3.1) (pressure retaining part)	<input type="checkbox"/>

### ■ ADMISSIONS / ACCREDITATIONS

AA1	EC Type examination acc. to Directive 2014/68/EU	<input checked="" type="checkbox"/>	AB2	Water regulations and advisory scheme WRAS type approval	<input type="checkbox"/>
AA4	EAC - certificate/declaration with passport for the valve and laser marking of the valve	<input type="checkbox"/>	AB3	Attestation de Conformité Sanitaire, ACS type approval	<input type="checkbox"/>
AB1	Deutscher Verein des Gas- und Wasserfaches, DVGW type approval	<input type="checkbox"/>			<input type="checkbox"/>

### ■ ENQUIRY


Copy and send to: [order@goetze-armaturen.de](mailto:order@goetze-armaturen.de).

Order form easily to be found online under the section for each series.

Series 9000:

Dimensioning by pressure loss on the outlet pressure side


### Flow chart water

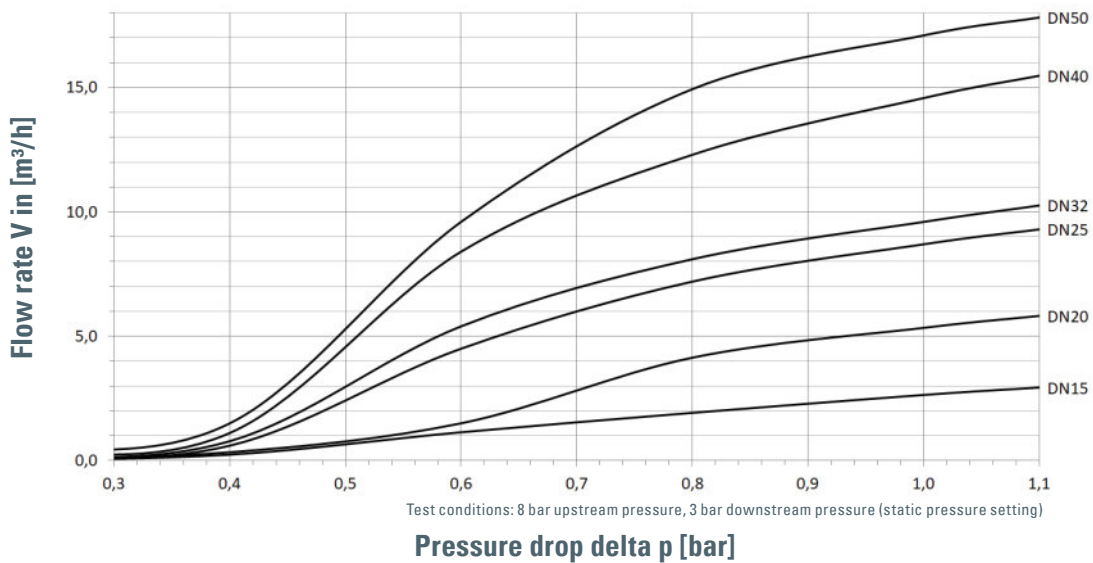


Dimensioning by flow velocity

#### Für Flüssigkeit/For liquids:

With help of the chart you can determine the nominal diameter (DN) for a given flow volume  $V$  ( $\text{m}^3/\text{h}$ ). According to DVGW-guidelines (DIN 1988) a flow velocity of 2 m/s in domestic water supply systems should not be exceeded.

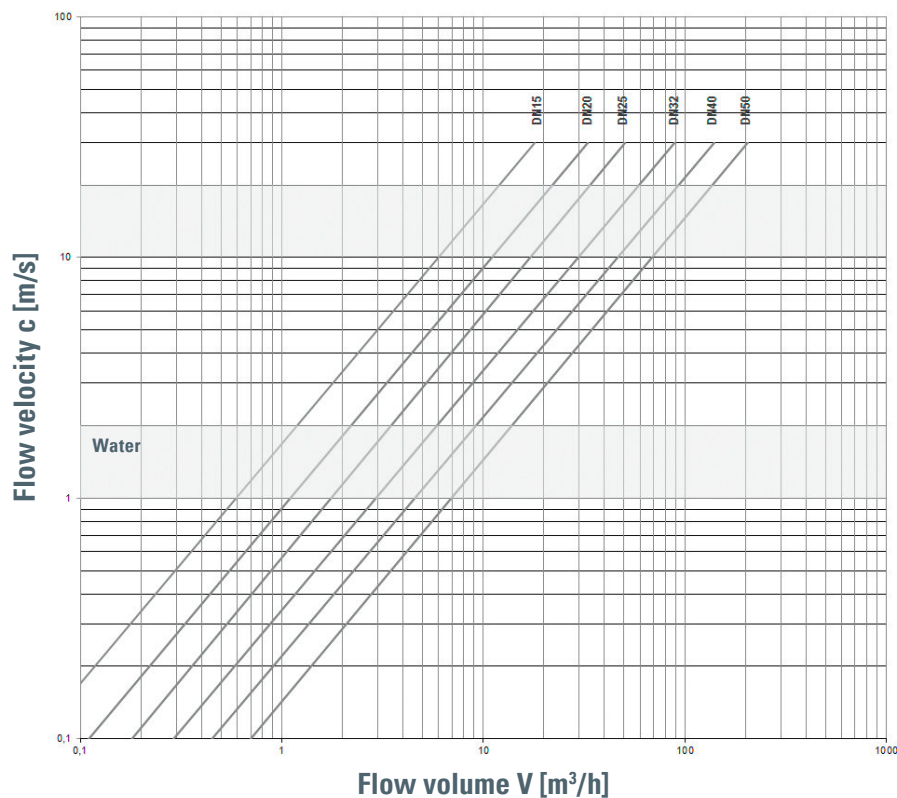

### → Spare parts overview | 9000 / 9040

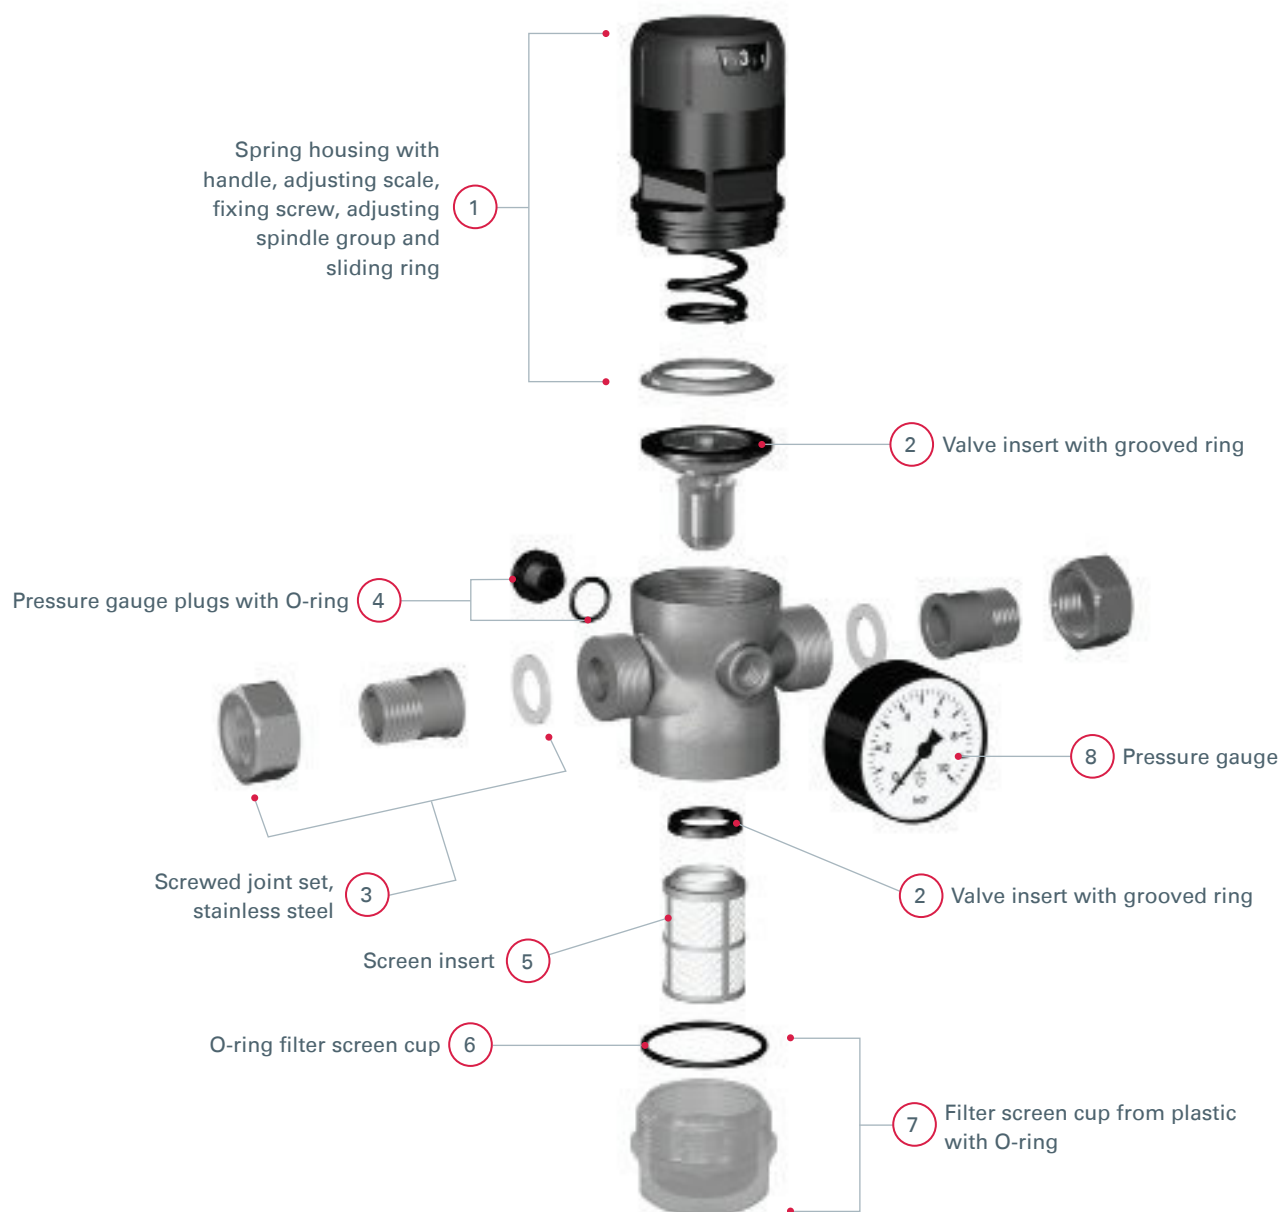

No.	Description	Size	Item No.
1	Spring housing with handle, adjusting scale, fixing screw, adjusting spindle group and sliding ring	½" – ¾"	E9000.015.010
		1" – 1 ¼"	E9000.025.010
		1 ½" – 2"	E9000.040.010
2	Valve insert with grooved ring	½" – ¾"	E9000.015.020
		1" – 1 ¼"	E9000.025.020
		1 ½" – 2"	E9000.040.020
3a	Screwed joint set 2x threaded nozzles 2x union nuts 2x seals	½"	E9000.015.030
		¾"	E9000.020.030
		1"	E9000.025.030
		1 ¼"	E9000.032.030
		1 ½"	E9000.040.030
		2"	E9000.050.030
3b	Screwed joint set, lead-free 2x threaded nozzles 2x union nuts 2x seals	½"	E9000.015.031
		¾"	E9000.020.031
		1"	E9000.025.031
		1 ¼"	E9000.032.031
		1 ½"	E9000.040.031
		2"	E9000.050.031
3c	Screwed joint set, stainless steel 2x threaded nozzles 2x union nuts 2x seals	½"	E9040.015.032
		¾"	E9040.020.032
		1"	E9040.025.032
		1 ¼"	E9040.032.032
		1 ½"	E9040.040.032
		2"	E9040.050.032
4	Pressure gauge plugs ¼" with O-ring (5x)	All	E9000.015.040
5	Screen insert 160µm	½" – ¾"	E9000.015.050
		1" – 1 ¼"	E9000.025.050
6	O-ring filter screen cup (10x)	1 ½" – 2"	E9000.040.050
		½" – ¾"	E9000.015.060
		1" – 1 ¼"	E9000.025.060
7a	Filter screen cup from plastic with O-ring	1 ½" – 2"	E9000.040.060
		½" – ¾"	E9000.015.070
		1" – 1 ¼"	E9000.025.070
7b	Filter screen cup from gunmetal, lead-free with O-ring	1 ½" – 2"	E9000.040.070
		½" – ¾"	E9000.015.071
		1" – 1 ¼"	E9000.025.071
7c	Filter screen cup, stainless steel with O-ring	1 ½" – 2"	E9040.040.071
		½" – ¾"	E9040.015.072
		1" – 1 ¼"	E9040.025.072
8a	Pressure gauge 0 – 10 bar	All	E9040.040.072
8b	Pressure gauge 0 – 25 bar	All	E9000.015.080
8c	Pressure gauge 0 – 4 bar	All	E9000.015.081
			E9000.015.082