

ZOOK®

ONE source for ALL your Rupture Disk needs...

- Holders
- Gaskets
- Burst Sensors
- Alarm Monitoring Systems
- Transportation Disks
- Sanitary Disks
- Explosion Vent Panels
- Extruder Barrels
- Special Applications

Service Personnel
are available...























24 hrs/day

7 days/wk

365 days/yr



Forward Acting (Tension-Loaded) Metal Rupture Disks













Disk Series	Sizes in./mm	Pressures psig/bar	Standard Operating Ratio ¹	Vacuum Support Required	UD ASME COMPLIANT	Seat Configuration Flow Direction	Standard Mating Holder
FAX  Solid metal scored, non-fragmenting design disk	1 – 12 25 – 300	45 – 1,500 3.10 – 103	85%	Contact ZOOK	Gas only	Flat 	FAH  Pre-torque design
FAC  Composite metal, fragment resistant design disk	1 – 12 25 – 300	3 – 1,500 0.21 – 103	80%	YES	Contact ZOOK	Flat 	Pre-torque design
SFAZ  Solid metal scored, non-fragmenting design disk	1/2 – 24 13 – 600	15 – 60,000 1.03 – 4138	85%	Contact ZOOK	Gas only	Flat 	UHZ  Bolted type insert design
D  Composite metal, fragment resistant design disk	1/2 – 24 13 – 600	3 – 2,000 0.21 – 138	80%	YES	Liquid and Gas	30° Angular 	7A  Bolted type insert design
FD  Composite metal, fragment resistant design disk	11/16 – 44 17 – 1117	3 – 2,000 0.21 – 138	80%	YES	NO	Flat 	UHZ  Bolted type insert design
PB  Solid metal, fragmenting design disk	1/4 – 24 6 – 600	3 – 50,000 0.21 – 3448	70% ²	YES	Liquid and Gas	30° Angular 	7A  Bolted type insert design
FPB  Solid metal, fragmenting design disk	1/8 – 44 3 – 1117	3 – 20,000 0.21 – 1379	70%	YES	NO	Flat 	UHZ  Flat seat insert
ARD  Composite metal, fragment resistant design disk	2 – 44 50 – 1117	1 – 60 0.07 – 4	50%	YES	NO	Flat 	Mounts between standard companion flanges – no holder required

¹ Standard operating ratio applies to the marked rating on the disk tag on disks marked above 40 psig.

Contact ZOOK for operating ratio on disks marked below 40 psig.

² Higher operating ratio may be available upon request.

Graphite Rupture Disks

Disk Series	Sizes in. / mm	Pressures psig / bar	Maximum Operating Ratio ¹	Vacuum Support Required	UD ASME COMPLIANT	Mounts directly between standard ASME B16.5 Class, DIN, or JIS flanges Flow Direction
MONO  <p>...best choice for low and intermediate burst ratings</p>	1/2 – 24 13 – 600	0.25 – 1,000 0.02 – 69	90% ²	Yes on pressures less than 25 psig	Liquid and Gas	
INVERTED  <p>...best choice for higher burst ratings</p>	1/2 – 24 13 – 600	0.25 – 1,000 0.02 – 69	90% ²	Contact ZOOK on pressures less than 25 psig	Liquid and Gas	
FS-INVERTED  <p>...best choice for highly corrosive and broad temperature range applications</p>	1/2 – 24 13 – 600	1.00 – 1,000 0.07 – 69	90% ²	Contact ZOOK on pressures less than 25 psig	Liquid and Gas	
DUPLEX  <p>...best choice for highly corrosive applications</p>	1/2 – 24 13 – 600	0.25 – 1,000 0.02 – 69	90% ²	Contact ZOOK on pressures less than 25 psig	Liquid and Gas	
TWO-WAY  <p>...dual rated to protect against two different pressures in opposite directions</p>	1-1/2 – 24 40 – 600	0.25 – 1,000 0.02 – 69	90% ²	N/A	NO	
INSULATED UNIT  <p>...for temperatures exceeding 430°F (221°C) to 700°F (371°C)</p>	1 – 24 25 – 600	0.25 – 1,000 0.02 – 69	90% ²	Contact ZOOK on pressures less than 25 psig	NO	

¹ Standard operating ratio applies to the marked rating on the disk tag on disks marked above 40 psig. Contact ZOOK for operating ratio on disks marked below 40 psig.

² Higher operating ratio may be available upon request.

Burst Sensors *Suitable for use in hazardous locations*

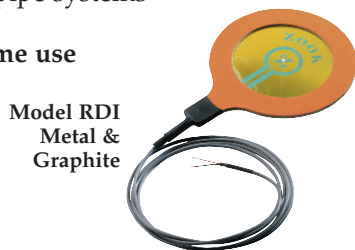
Re-usable



Model BA
Metal & Graphite

...fits easily into existing pipe systems

One time use



Model RDI
Metal & Graphite

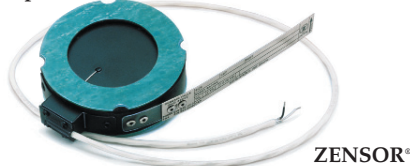
Integral Indicators



Metal

BI

Graphite



ZENSOR®

...ideal for a wide range of applications

Alarm Monitoring System
















LD

...optional leak detection device for BA and RDI Burst Sensors







...ZAM Plus alarm monitor is designed to remotely detect the condition of up to eight rupture disks in service



Transportation Rupture Disks

Disk Series	Sizes in.	Standard Pressures psig @ 72°F	Standard Operating Ratio ¹		Vacuum Support Required	UD ASME COMPLIANT	Features	Disk Mounting Flow Direction
			positive	negative				
RailCar  Graphite rupture disk	2	60, 100, 165	90%		NO	NO	<ul style="list-style-type: none"> • PTFE & Viton liner on process side • Carbon Steel Armor • TFE coated green • Non-Asbestos gasket on vent side 	2" AAR metal seated safety vents 
AcidCar  Graphite rupture disk	2	60, 100, 165	90%		NO	NO	<ul style="list-style-type: none"> • PTFE & Viton liner on process side • Carbon Steel Armor • TFE coated green • Non-Asbestos gasket on vent side 	2" AAR rubber covered safety vents 
TD  Graphite rupture disk	2,3, 4	30, 35, 40, 45, 50	90%		NO	YES	<ul style="list-style-type: none"> • PTFE liner on process side • Carbon Steel Armor • TFE gasket on pressure side • Non-Asbestos gasket on vent side • TFE coated green 	Standard ASME B16.5 Class 150 flanges 
TCP-NR TCP-R  Composite metal, fragment resistant design disk	2	75, 100, 165	50%		NO	NO	<ul style="list-style-type: none"> • 316SS construction w/PFA seal 	Fits standard tank car safety vents  TCP-NR Fits standard tank car safety vents  TCP-R
TCP-S  Solid metal scored, non-fragmenting design disk	2	75, 100, 165	85%		NO	NO	<ul style="list-style-type: none"> • 316SS construction w/PFA seal • 316SS locating ring on vent side 	Fits standard tank car safety vents 
ICP  Solid metal scored, non-fragmenting design disk	2-1/2 & 3	54.4, 63.8 (68°F & 140°F)	85%		NO	NO	<ul style="list-style-type: none"> • Nickel disk construction • PTFE gasket & PFA liner on process side • 316SS locating ring on vent side 	Standard ASME B16.5 Class 150 & ISO flanges 

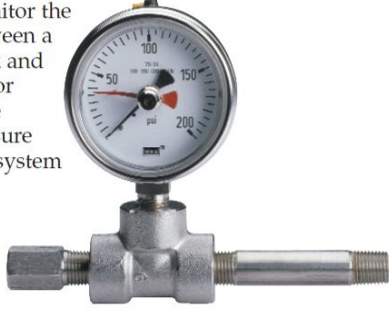
Ultra-Low Pressure Rupture Disks

Disk Series	Sizes in./mm	Pressures		Standard Operating Ratio ¹		UD ASME COMPLIANT	Seat Configuration Flow Direction	Standard Mating Holder
		positive	negative	positive	negative			
 ProPOS Dual-acting, tension loaded, design disk	2 – 14 50 – 350	1" of water column to 30"	2 psig to 150 psig	-0- w/TFE girdle 20% w/316SS girdle	80%	NO	Flat  	
 ProVAC Dual-acting, tension loaded, design disk	2 – 14 50 – 350	2 psig to 150 psig	1" of water column to 30"	-0- w/TFE girdle 20% w/316SS girdle	80%	NO	Flat  	

¹ Standard operating ratio applies to the marked rating on the disk tag on disks marked above 40 psig. Contact ZOOK for operating ratio on disks marked below 40 psig.

Accessory Kit

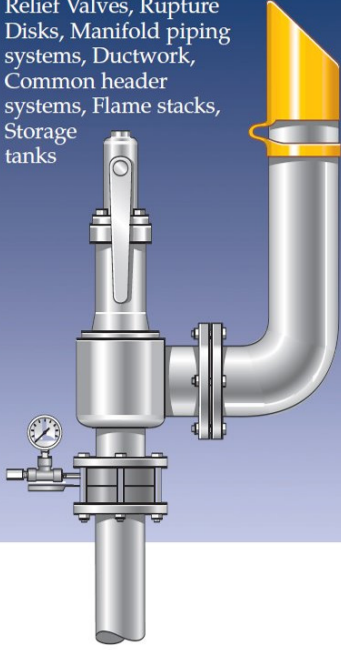
...used to monitor the air gap between a rupture disk and relief valve or the presence of backpressure in a header system



Pipe End Covers

Applications

Protection of Safety Relief Valves, Rupture Disks, Manifold piping systems, Ductwork, Common header systems, Flame stacks, Storage tanks



The products shown in this bulletin will improve your operating efficiency, protect equipment and personnel from the effects of overpressurization in static and dynamic pressurized systems, and are immediately available.

Explosion Vent Panels

...provide over-pressure relief to minimize structural or mechanical damage caused by expanding gases



Extruder Barrels

...designed for over-pressure protection of plastic extrusion processes



Union and Screw Type Disk Holders

...reusable units for use on high pressure equipment, gas cylinders, laboratory equipment, autoclaves. Contact ZOOK for information concerning your application.



Credits
Viton – TM DuPont
TD, SD – TM ZOOK Enterprises, LLC

AVC
Vana'da Güçlü Partneriniz

ENDÜSTRİYEL ÜRÜNLER Sanayi ve Ticaret Ltd. Şti.

Can Sokak No: 7/B Kozyatağı 34742 Kadıköy / İstanbul

Tel.: 0216 384 43 67 Fax: 0216 384 43 69