



# KARACA GEMİ

## SHIP WINDOWS & PORTHOLES

### OPENING WINDOW

Opening windows are designed mainly for mounting (welding or bolting) in walls of superstructure. Windows are designed according to ISO 3903.

Special shaped windows (trapezoid, parallelogram, etc.) are available.

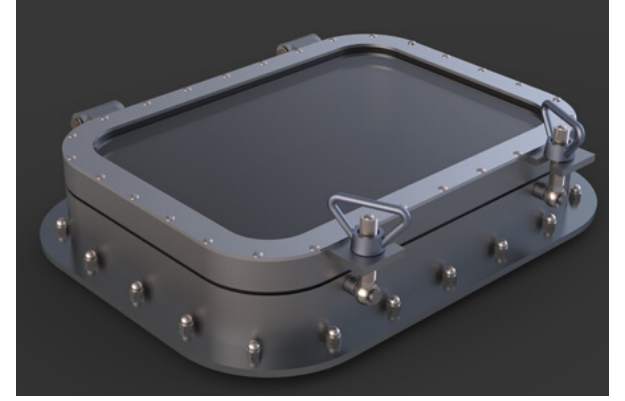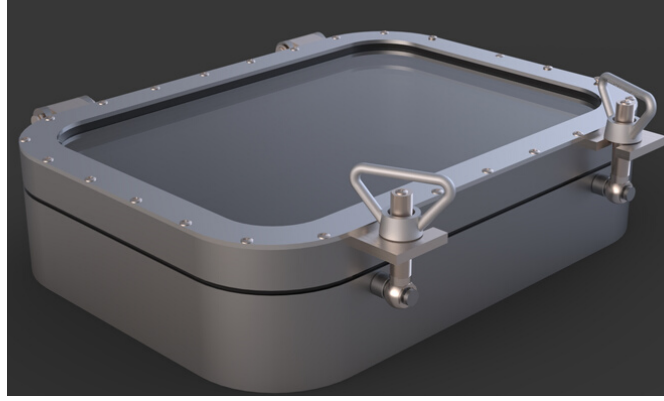

### FRAME MATERIAL

Steel  
Stainless Steel  
Aluminium Alloy  
Brass

### GLASS RETAINING FRAME

Steel  
Stainless Steel  
Aluminium Alloy  
Brass

### GLASS

Single  
Laminated  
Double Glazed  
El. Heated  
Bullet Proof  
Sound Proof

### ACCESSORY

Clear View Screen  
Deadlight  
Roller Blind  
Wiper

Nominal Size			Main Frame			Cut Out			Glass Thickness		Fasteners
Wi	Hi	Ri	Wo	Ho	Ro	Wc	Hc	Rc	Type E	Type F	Qty.
300	425	50	348	473	74	352	477	76	10	8	4
355	500	50	403	548	74	407	552	76	10	8	4
400	560	50	448	608	74	452	612	76	12	8	4
450	630	100	498	678	124	502	682	126	12	8	4
500	710	100	548	758	124	552	762	126	15	10	6
560	800	100	608	848	124	612	852	126	15	10	6
900	630	100	948	678	124	952	682	126	19	12	6
1000	710	100	1048	758	124	1052	762	126	19	12	8
1100	800	100	1148	848	124	1152	852	126	-	15	8

\*The dimensions are mm